


FERMADUR®-C

Product Information

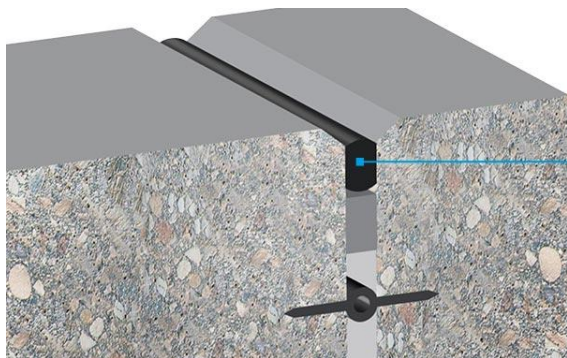

FERMADUR®-C

Special Advantages:

- ✓ Can be installed in almost any weather conditions.
- ✗ No primer or adhesive is needed.
- ✓ Quick and professional installation by trained personnel.
- BAR Withstands water pressure of up to 1.0 bar.

FERMADUR®-C is a compression seal made of chloroprene rubber (CR) for UV- and ozone-stressed joints.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Product Description

FERMADUR®-C is a sealing strip made of vulcanized, cellular rubber with a closed-cell, smooth exterior skin and a circular cross-section.

FERMADUR®-C seals joints via restoring forces that are created by the deformation

of the sealing profile when it is installed in the joint. Bonding to the joint walls is not necessary. Accordingly, **FERMADUR®-C** can be worked with in summer and in winter, in rain or in snow, independently of the weather conditions. Even with leaky

joints under constant water pressure, **FERMADUR®-C** can still be installed and is effective immediately.

Applications

The **FERMADUR®-C** system is equally suitable for new construction work and restoration work. Typical areas of use include sealing working and expansion joints, in civil engineering in particular, in:

- Sewage treatment plants
- Locks
- Swimming pools
- Prefabricated building parts
- In bridge-building, at cap/central longitudinal joints

FERMADUR®-C is widely used in industry for collecting pools, retention basins, filling stations and storage areas as a joint seal for substances hazardous to drinking water.

Product Application

Important requirements to ensure the sealing effect of **FERMADUR®-C** are minimum and total deformation. The joint to be sealed must therefore be measured and surveyed exactly. When calculating strip parameters, the expected changes to the joint width from the component movements and the water pressure acting on the joint must be taken into account. In addition, the structural design of the joint and the surface of the components must be in accordance with DIN 18 540, sheet 1: "Internal joint surfaces must run parallel to a depth of $D=2xW$." In the joint areas, the concrete must be so impermeable to water that no water circulation can occur at the expected water pressure.

In addition, the joint walls must be even and clean, and must not exhibit chipping or cavities over a depth twice that of the joint width. If necessary, improvements to the concrete or mortar can be made using silicification or impregnation.


The application temperature range is from -10 °C to +50 °C (+14 °F to 122 °F).

Connection points and crossing points are connected or glued using **SICOMET 8300**.

The adhesive must be stored in a cool place (also at the construction site).

FERMADUR®-C can be installed by hand or with a machine.

The joint gap width should not be less than 15 mm and not exceed 35 mm.

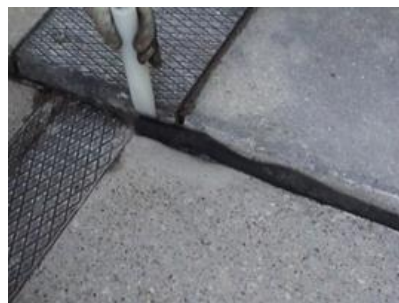

Sealing work using **FERMADUR®-C** strips must be carried out by well-trained and experienced specialist personnel. As a rule, work is usually carried out by contractors whose employees have been trained by DEKOTEC GmbH.

Typical Material Properties

Properties	Unit	Value
Tensile strength	N/mm ²	≥3
Elongation after fracture	%	≥150
Recovery tension (15 min. at +23 °C/+73.4 °F, 25% deformation)	N/mm ²	0.20-0.40
Compression set (after 24 h storage at +70 °C/+158 °F)	%	≤ 27

The water pressure resistance of the installed **FERMADUR®-C** strip was tested on a DN 1800 pipe fitting under the supervision of MPA Dortmund. The test was performed without a factory-fitted sleeve seal and without the

compression seal strip being braced to the rear. Installation and dimensioning were performed in accordance with the manufacturer's instructions by a trained specialist company.

Under these conditions, it was determined that a water pressure resistance of up to 1.0 bar can be achieved. A corresponding test report is available.

Material Resistance

Resistance against chemical and physical factors.

Resistant to:

- Waste water with pH values of 2 to 12
- Dilute acids and alkalis
- Chlorinated water
- Detergents
- Weathering

Limited resistance to:

- Petrol
- Mineral and heating oil
- Alcohol

Short-term resistance only versus:

- Organic solvents (e.g. toluene, ethyl acetate)

To enquire about a specific load factor, please contact us, stating the chemical name.

Ordering Information

Strip diameters start at 10 mm and are available in various diameters up to 54 mm.

Delivery is in bundles with individual lengths of 5 m to 15 m, depending on strip diameter.

The colour is black.

To glue the profiles together, **SICOMET 8300** cyanoacrylate adhesive is used, this is supplied in 50 g units.

DEKOTEC GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany
Phone: +49 214 2602-0 | info@dekotec.com
www.dekotec.com

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at www.dekotec.com, apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation, the German text of the respective German product information, shall be decisive. The legal relationship shall be governed by German law.