







LIQUITOL[®]-IPL

Product information

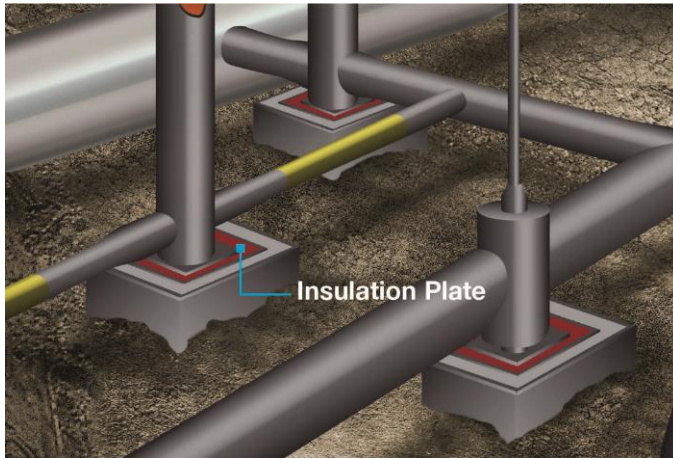

Special advantages:

-  High resilience and durability.
-  High electrical resistance.
-  Prevents prestressed funnel.
-  Thermally and chemically durable.
-  Qualified for armatures foundations, for the insulation of cable crossings and as root protection.

Polyurethane Insulation Plate for the electrical insulation of pipelines and armatures.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Description

The **LIQUITOL[®]-IPL** with its high electrical insulation properties, guarantees a reliable electrical separation between cathodic protected pipelines and foundations made from concrete. Voltage drops are prevented by this

insulation. A high mechanical resilience as well as a low creep and therefore a high durability are provided based on the cross-linked molecule structure of the polyurethane. In addition, LIQUITOL[®]-IPL features a very good thermal and

chemical durability. Based on its flexibility, the insulation plate can be used for the insulation of valve foundations as well as for the insulation of pipelines at cable crossings as well as root protection mat.

Processing

The insulation plate will be inserted between the concrete foundation and the valve as described for example in guideline GL 263-501 of the Open Grid Europe, RWE Thyssengas and Verbundgas.

A good adhesive connection of the **LIQUITOL®-IPL** to the steel surface is achieved with the polyurethane

coating material **LIQUITOL®-FK2 C**. For this purpose, the insulation plate should be slightly roughened and should be cleaned of all loose parts. In addition, the casting of sliding feet foundations with **TOK®-Melt**, a pouring compound made from polymer modified bitumen, or **LIQUITOL®-SU**, a polyurethane pouring compound, has

proven to be successful, which provides an additional protection and insulation of the foundation. We recommend the pouring with the permanent plastic mastic **PLASTELEN®-KS** for the corrosion prevention of the valve rods.

Typical product properties

Property	Unit	Typical value	Test method
Tensile strength	N / mm ²	>25	DIN EN ISO 527-3
Elongation at break	%	>600	DIN EN ISO 527-3
Hardness	Shore D	40	DIN ISO 7619-1
Dielectric strength	kV	>35	-
Volume resistivity	Ω m	3 x 10 ¹¹	DIN IEC 93

Ordering information and form of delivery

LIQUITOL®-IPL

Color	Width (m)	Length (m)	Thickness (mm)	Weight (Kg)
Black	1	1	5	5

Additional dimensions available on request.

Storage conditions

When stored in its original, unopened packaging, **LIQUITOL®-IPL** can be stored for at least 24 months after the manufacturing date. Storage temperature: +15°C (+59°F) to +30°C (+86°F).

The product must be stored in a location that is protected from frost.

DEKOTEC GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany
Phone: +49 214 2602-0
www.dekotec.com | info@dekotec.com

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.dekotec.com, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.